

INSULATE
SEAL
PROTECT

3:1
SHRINK RATIO



HEAT SHRINK WRAPAROUND SLEEVE

HEAVY WALL, FLAME RETARDANT, HEAT SHRINK WRAPAROUND SLEEVE WITH ADHESIVE FOR COMPLETE ENVIRONMENTAL SEALING WITHOUT THE NEED FOR DISCONNECTION. IDEAL FOR RETROFIT PROTECTION OF EXPOSED CONNECTORS AND THE REPAIR OF DAMAGED CABLE

FEATURES AND BENEFITS

- 3:1 shrink ratio
- Fast and simple installation without interruption of service
- Repair damaged cable jackets
- Suitable for low voltage electrical and mechanical applications
- Proven thermoplastic adhesive ensures an absolutely waterproof seal
- High impact and abrasion resistance
- Flame retardant
- FCFW QuickWrap can be cut to size in field to suit application
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C


TYPICAL APPLICATIONS

- Connectorized cable repair
- Retrofit protection of connectors
- Cable jacket repairs



DIMENSIONS

ORDER NUMBER	LENGTH		WIDTH		RECOMMENDED OVERLAP				EXPANDED SLEEVE I.D. WITH OVERLAP				APPLICATION RANGE (MIN. - MAX.)		CONDUCTOR SIZE
	IN	MM	IN	MM	IN (MIN.)	MM (MIN.)	IN (MAX.)	MM (MAX.)	IN (MIN.)	MM (MIN.)	IN (MAX.)	MM (MAX.)	IN	MM	AWG/MCM 600/1000 V
1500	12	305	5.7	145	1.13	28.6	2.36	59.8	0.75	19.1	1.14	29.0	0.50 - 1.00	13 - 25	#2/0 - 350
2000	12	305	7.3	185	1.13	28.6	3.14	79.8	1.00	25.4	1.64	41.7	0.70 - 1.50	18 - 38	250 - 500
2700	12	305	9.5	241	1.20	30.5	4.24	107.7	1.35	34.3	2.32	58.9	1.00 - 2.00	25 - 58	600 - 1000

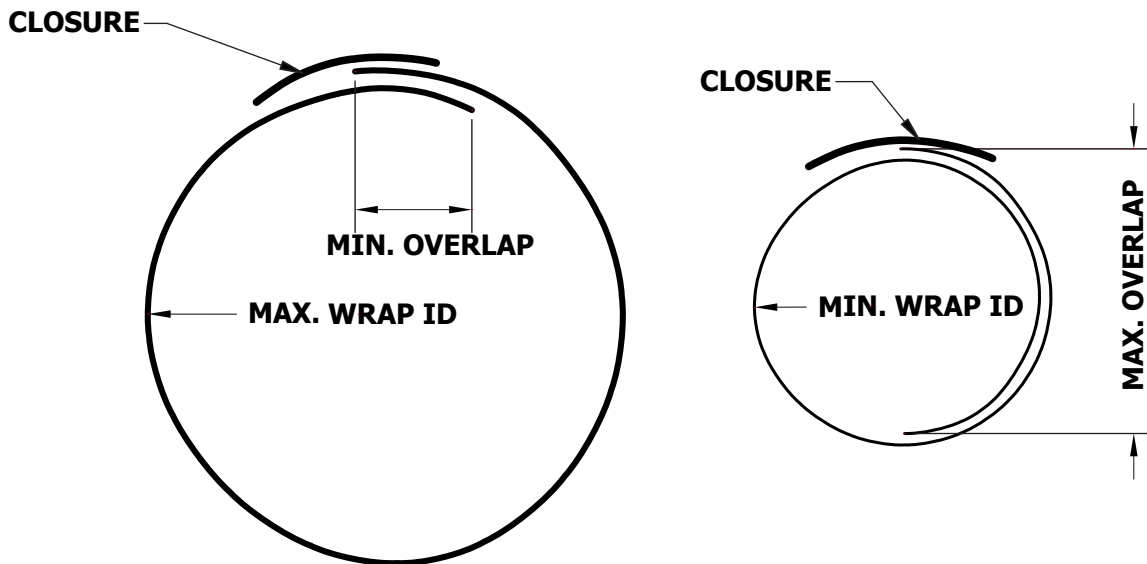

INSTALLATION NOTES

- FCFW QuickWrap is a one size fits all solution that can accommodate all sizes of cable and connectors. QuickWrap sleeves can be cut to length and width in the field to fit the specific application. Simply wrap the sleeve around the cable or connector, ensuring adequate overlap (allow for a minimum of 3 in or 76 mm), and then firmly apply the closure to hold FCFW QuickWrap together during the heat shrinking process. Please refer to the installation instructions included with each FCFW QuickWrap for more detailed information.

ORDERING

- Please specify the product name plus the options you require
- Order Example: FCFW QuickWrap 1500, 12 in length

Please contact your Customer Service Representative for information on custom sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.